


## Series CASSAFORTISSIMA 3200CCE

Certified mobile safe

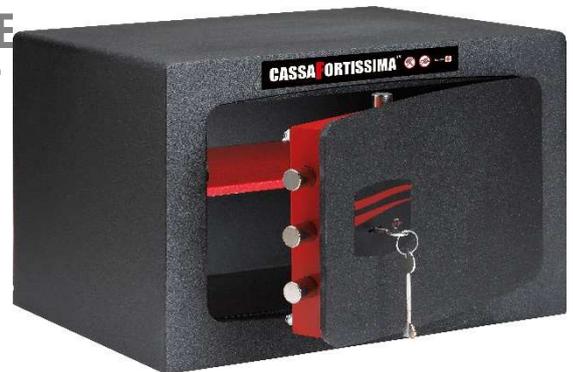

### Characteristics

Mobile safe cabinet with S2 safety level according to EN 14450:2017 and ECB.S C10


- **Shatterproof and Resistant to the Cutting Disc, made with 45° 3D Laser System technology, whose cut between the door and the frame prevents it from breaking through and is also resistant to break-ins from the Cutting Disc since the door is equipped with plates, positioned also on the sides and top, made with latest synthetic minerals generation.**

- "High tech" laser cutting, monobloc front frame with cutting gap between frame and door of only 2/10 mm
- Monobloc front in 10 thick special steel + 10 mm anti-cut plate
- Full compartment opening
- Oversized hinge with self-lubricating bushes, anchored to the front in a defiled position
- Fully robotized high-resistance welding
- Epoxy painting with double phosphating
- Special door stops specifically designed to effectively resist break-in attempts with a sledgehammer
- Wall and floor anchoring holes (2 + 2)

### Locking system

- **Class A High security lock Certified according to EN 1300:2018 and ECB.S C10**
- Double bit female lock with two throws.
- 7 asymmetric levers, 5 in Carbonitrided Steel + 2 in Harmonic Steel with interdependent springs with directpulling of the bolts, a configuration that increases resistance to destructive attacks from the bolt.
- Rotating deadbolts in carbonitrided and nickel-plated steel.
- Extraction of the inhibited key with the lock open.
- Increased chin guard in hardened steel.
- 2 keys supplied

## Products code and information



| Code    | Measures mm |             | Bolts | Shelves | Sales Unit | Peso Kg | Volume Lt |
|---------|-------------|-------------|-------|---------|------------|---------|-----------|
|         | External    | Internal    |       |         |            |         |           |
|         | LPH         | LPH         |       |         |            |         |           |
| 3202CCE | 370*320*240 | 330*225*260 | 2     | 1       | 1          | 26,5    | 19.30     |
| 3204CCE | 430*370*290 | 390*275*310 | 2 + 2 | 1       | 1          | 36,8    | 33.30     |
| 3205CCE | 500*400*330 | 460*315*340 | 3 + 2 | 1       | 1          | 47,7    | 49.30     |
| 3207CCE | 410*400*570 | 370*555*340 | 3 + 2 | 1       | 1          | 61,6    | 70.00     |